

固件升级说明

FIRMWARE UPGRADE GUIDE

Only for **B50**

工具准备：B50，电源，数据线，电脑，固件升级包

Tools: B50, Power Supply, Data cable, Computer, Firmware upgrade package

B50接通电源后，启动屏将显示固件版本号；或进入设置页面，滚动到页面底部查看固件版本。

After connecting the B50 to power, the startup screen will display the firmware version number; or enter the [Setup] page and scroll to the bottom to view the firmware version.



固件版本号通常按【Vx.xx】命名，其中【Vx】为硬件版本，【.xx】为软件版本。


Firmware version numbers are typically named as [Vx.xx], where [Vx] represents the hardware version, and [.xx] represents the software version.

从官网下载最新的固件包存至你的电脑，并解压缩固件包，得到【app.upga】文件备用。

Download latest firmware package from official website, and unpack it to get the [app.upga] file for backup.

1 数据线连接电脑，按住B50 左边方向按键，将数据线插入B50。

Connect data cable with PC firstly, Then press and hold the B50 left arrow key at same time insert the data cable into the B50.

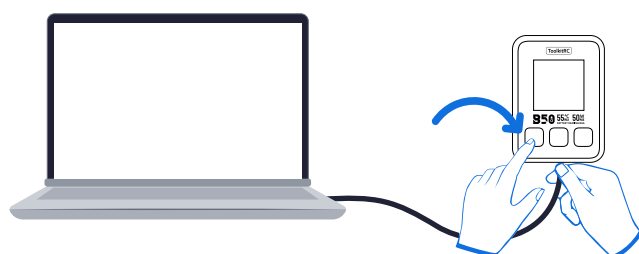

2 电脑识别到充电器磁盘【Toolkit】。

Computer Recognizes Charger Disk [Toolkit].



3 将固件升级包中的【app.upga】复制到【Toolkit】磁盘。

Copy [app.upga] firmware upgrade package to the [Toolkit] disk.



这里将会有进度条出现，等待进度条执行完毕，升级完成。如果没有出现进度条，则可能下载版本不匹配，需下载与本机相同硬件版本的固件。

A progress bar will appear here. Wait for the progress bar to complete, and the upgrade will be finished. If no progress bar appears, the downloaded version may be incompatible. You will need to download firmware matching your device's hardware version.



4 复制完成后退出【Toolkit】磁盘。

Exit the [Toolkit] disk after successful copying.

5 拔出数据线，充电器开机检查升级后的固件版本。

Disconnect the data cable, power on the charger to check the upgraded firmware version.

升级完成后，重新连接电脑，磁盘【Toolkit】为空是正常现象

After the upgrade is complete, reconnect the computer. It is normal for the disk [Toolkit] to be empty.